






STAR Pro SERIES N-TOPCon 108-cell MODULE BIFACIAL


EG-430NT54-HL/BF-DG

410~430W

0~3% POSITIVE TOLERANCE


KEY FEATURES

- 
SMBB cell design
 Super multi Busbar cells brings lower resistance and increased Busbar reflectance ensures higher power output
- 
Low degradation
 Adopt N-Type TOPCon cell technology, lower degradation and better temperature co-efficiency, greatly increased on generation performance
- 
High Reliability
 Strict in-house testing in PV Lab which is CNAS approved & TUV /VDE certified
- 
Excellent Low-light Performance
 Advanced solar cell and glass surface texturing technology allows for excellent performance in low-light environments
- 
PID Resistant
 Excellent PID resistance performance optimized by unique structural design

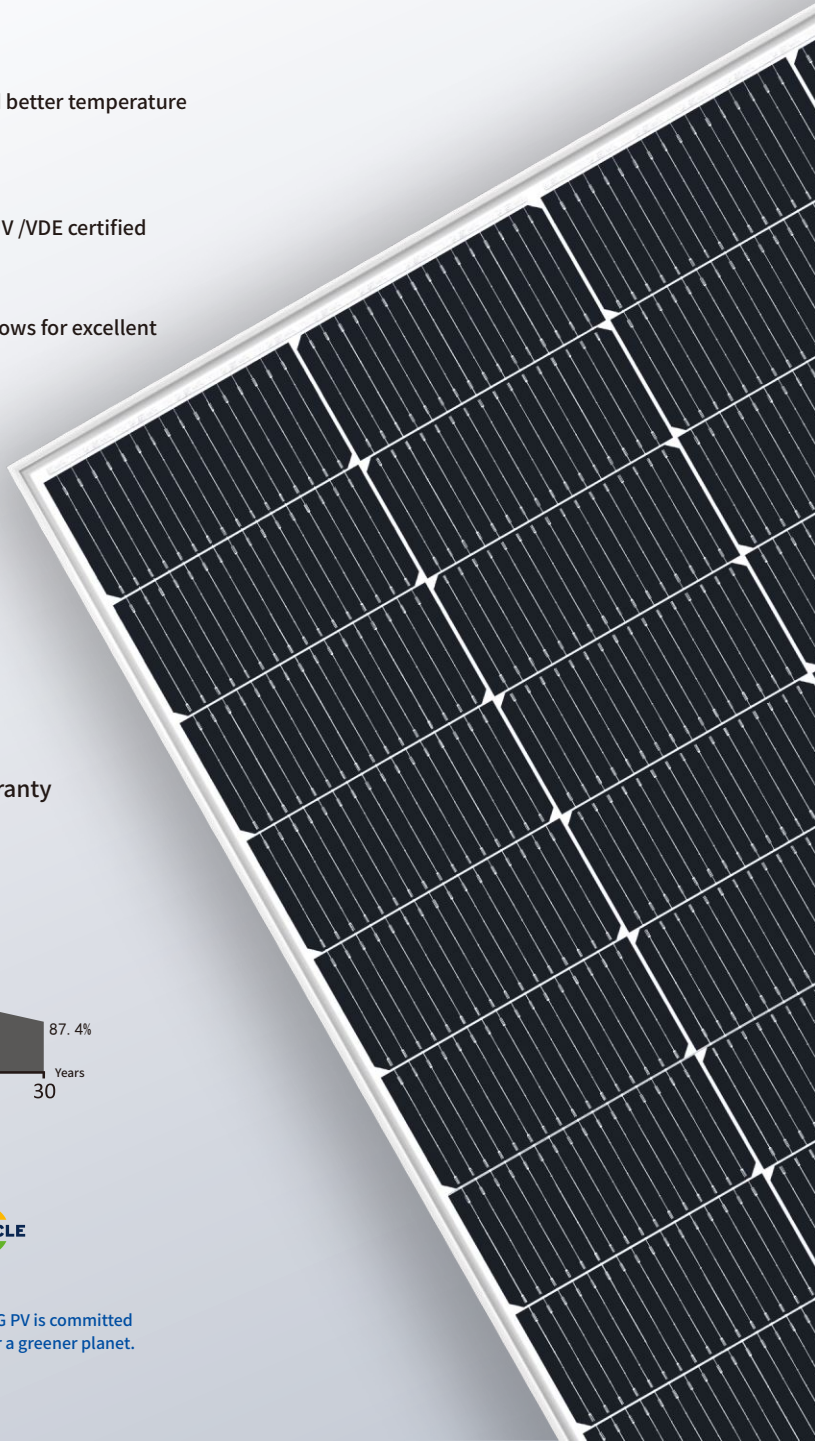

LINEAR PERFORMANCE WARRANTY


 12 Year Product Warranty  30 Year Linear Power Warranty

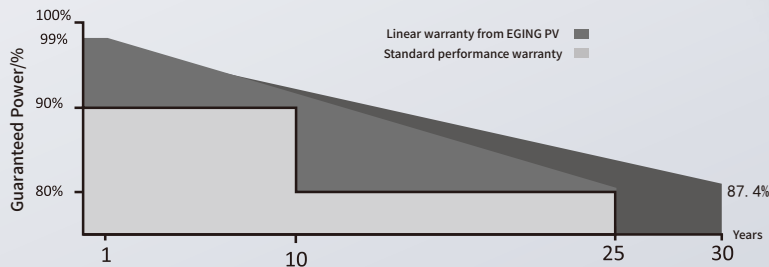


As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGING PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

EG-430NT54-HL/BF-DG

Engineering Drawings

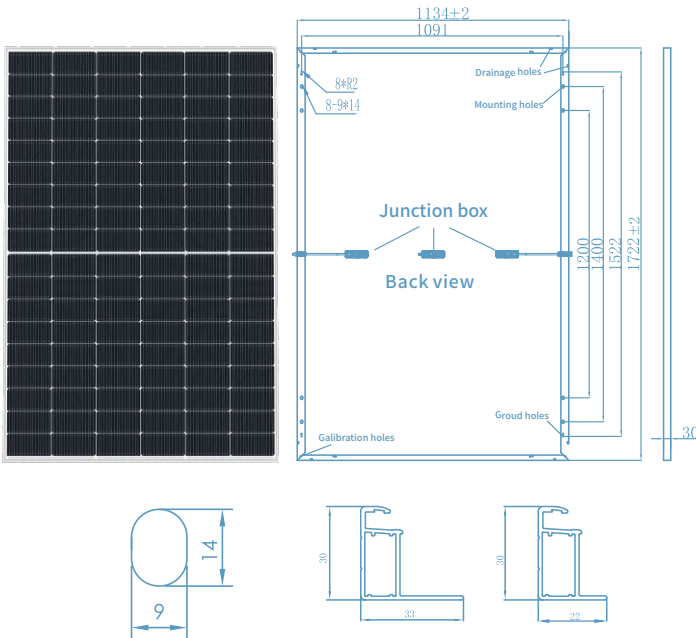

I-V Curves

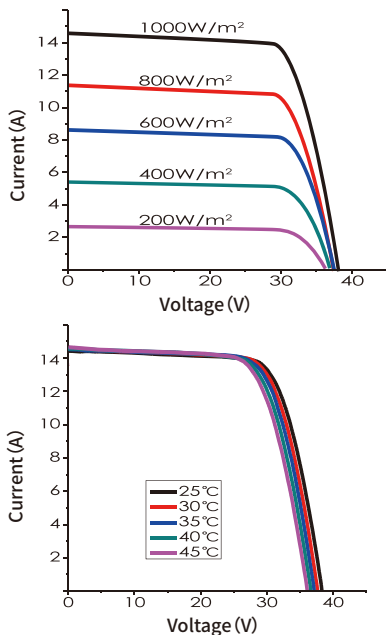

Packing Configuration

Pieces per pallet	36
Size of packing (mm)	1750*1135*1255
Weight of packing (kg)	916
Pieces per container	936
Size of container	40'HC

Electrical Characteristics

Power level	410	415	420	425	430
Pmax (W)	410	415	420	425	430
Vmp (V)	31.09	31.28	31.47	31.65	31.83
Imp (A)	13.19	13.27	13.35	13.43	13.51
Voc (V)	37.65	37.84	38.03	38.21	38.39
Isc (A)	13.98	14.07	14.16	14.24	14.32
Module efficiency (%)	20.99	21.25	21.50	21.76	22.02
Maximum system voltage (V)	1500				
Fuse Rating (A)	25				
Temperature coefficient Pmax (%/°C)	-0.30				
Temperature coefficient Isc (%/°C)	0.046				
Temperature coefficient Voc (%/°C)	-0.25				

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

Bifacial Output-Backside Power Gain

10%	Pmax(W)	451	457	462	468	473
	Module efficiency (%)	23.10	23.40	23.66	23.97	24.22
20%	Pmax(W)	492	498	504	510	516
	Module efficiency (%)	25.20	25.50	25.81	26.12	26.42

Working Characteristics

Power level	410	415	420	425	430
Pmax (W)	309	312	316	320	323
Vmp (V)	28.88	28.97	29.16	29.36	29.45
Imp (A)	10.70	10.77	10.84	10.90	10.97
Voc (V)	35.79	35.87	36.05	36.22	36.39
Isc (A)	11.34	11.42	11.49	11.56	11.62
Power tolerance (%)	0~+3				
NOCT (°C)	44±2				

NOCT: Conditions: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Mechanical Characteristics

Number of cells	108pcs
Size of cell (mm)	182*91
Type of cell	N-type Mono
Thickness of glass (mm)	2.0
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	1722*1134*30
Weight (kg)	24.2
Cables/connectors	4mm², MC4 original
Length of Cabel	Portrait: +1000mm/-1000mm

Maximum Ratings

Operating Temperature(°C)	-40~85
Operating humidity(°C)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s



Tel: 86-519-82585880
 Zip: 213213
 Add: No.18, Jinwu Road, Jintan Dist, Changzhou City, Jiangsu Province.
 Email: marketing@egingpv.com
 Web: www.egingpv.com

Revised in May 2023 1st Edition

CAUTION: All rights and explain reserved by EGING PV.
 Specifications included in this datasheet are subject to change without notice.